



Shown: 72" model

MODEL NUMBER

3020

DESCRIPTION

Shade of die cut mica discs & copper rivets with a Lucite frame and cable or rigid stem suspension.

FINISH

Deep brown oxide.

SHADE

Mica discs.

DIMENSIONS

MODEL NUMBER	MIN OAL	NET WT
3020.16	16"W x 16"L x 12"H 16" Min. OAL	30 lbs.
3020.36	10"W x 36"L x 15"H 24" Min. OAL	55 lbs.
3020.42	10"W x 42"L x 15"H 24" Min. OAL	60 lbs.
3020.48	10"W x 48"L x 15"H 24" Min. OAL	65 lbs.
3020.54	10"W x 54"L x 15"H 24" Min. OAL	75 lbs.
3020.60	10"W x 60"L x 15"H 24" Min. OAL	80 lbs.
3020.72	12"W x 72"L x 18"H 30" Min. OAL	120 lbs.

3020.36

10"W x 36"L x 15"H 24" Min. OAL 55 lbs.

3020.42

10"W x 42"L x 15"H 24" Min. OAL 60 lbs.

3020.48

10"W x 48"L x 15"H 24" Min. OAL 65 lbs.

3020.54

10"W x 54"L x 15"H 24" Min. OAL 75 lbs.

3020.60

10"W x 60"L x 15"H 24" Min. OAL 80 lbs.

3020.72

12"W x 72"L x 18"H 30" Min. OAL 120 lbs.

CEILING PLATE

4.5"Ø x .25"

VOLTAGE / LAMP TYPE

120V, E26 base, 2,700°K, 90+ CRI, A19 LED lamp, frosted.

3020.16 60W (4 x 15W), 6,400 lumens.

3020.36 75W (5 x 15W), 8,000 lumens.

3020.42 90W (6 x 15W), 9,600 lumens.

3020.48 105W (7 x 15W), 11,200 lumens.

3020.54 120W (8 x 15W), 12,800 lumens.

3020.60 135W (9 x 15W), 14,400 lumens.

3020.72 150W (10 x 15W), 16,000 lumens.


CA Title 24-JA8-2019-E

PLEASE SPECIFY


Cable or rigid stem suspension & OAL (net price includes cable/stem for an OAL of up to 48").

Refer to price book for additional cable/stem length.

Cable OAL can be adjusted in the field at installation.

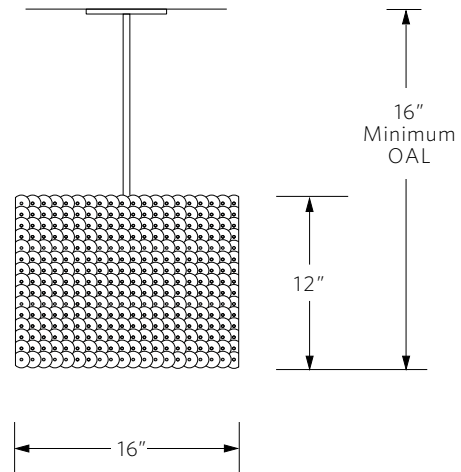

Model 3020.16
(available in rigid stem only)

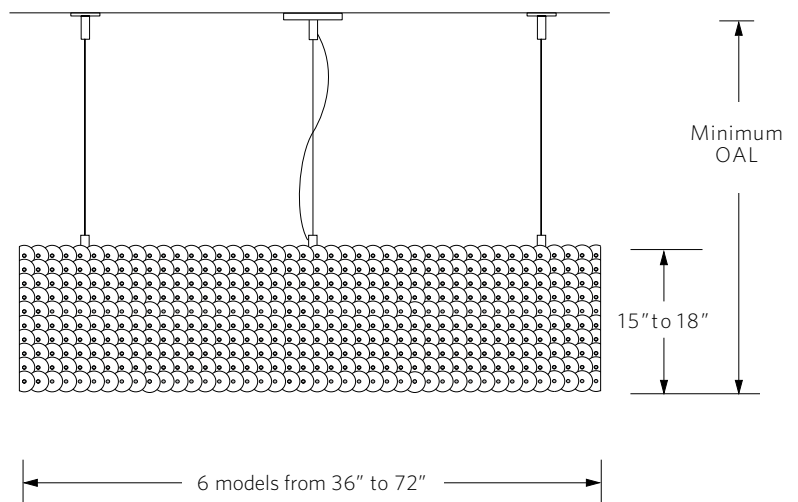

Models 3020.36, 3020.42, 3020.48, 3020.54, 3020.60, 3020.72

ceiling plate

